





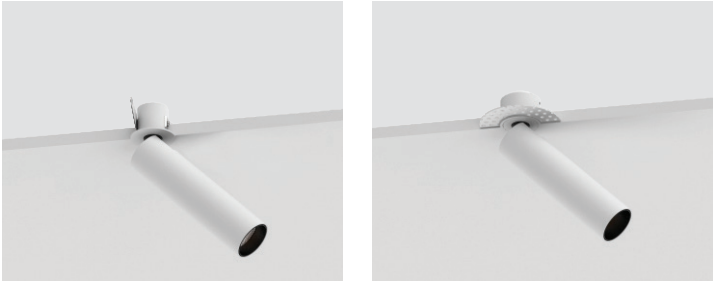



PROJECT NAME: <div></div>	TYPE: <div></div>
------------------------------	----------------------




1" _____


	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES		
1 INCH	R Round	26	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 08 Watts Lumens Divd.-742	27  2700K	<div><div></div><div></div><div></div><div></div></div> <div>25° 35° 15° 25° 35°</div>	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	BRKT-R25 Non-IC Bracket for Three Lights *For LN75-R26QS BRKT-R29 Non-IC Bracket for Three Lights *For LN75-R26QT *For more details,pls refer to page 3		
			QT Trimless Drywall	W White	W White	G Gold	97 97+ CRI 08 Watts Lumens Divd.-536	30  3000K				35  3500K	40  4000K
			Dim To Warm			1830  1800-3000K	2765A  2700K 3000K 4000K 5000K 6500K						
			TUNABLE WHITE			2765  2700-6500K							
1 Inch Recessed Round Adjustable Spotlight													

Photometry


Beam angle: 35°
Delivered Lumens: 742 lumens
CCT: 4000K
CRI: 90
Power: 8W
Efficacy: 92.7lm/w

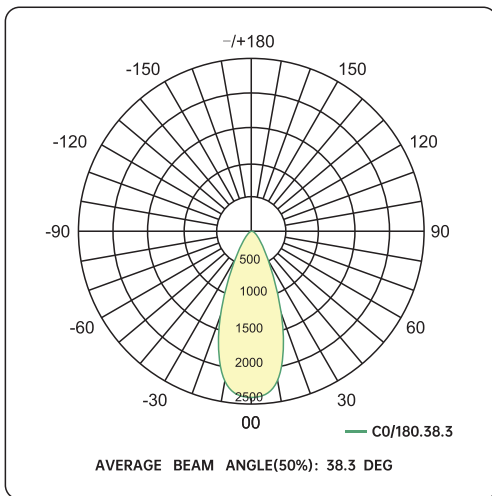

Beam angle: 25°
Delivered Lumens: 632 lumens
CCT: 4000K
CRI: 90
Power: 8W
Efficacy: 79lm/w

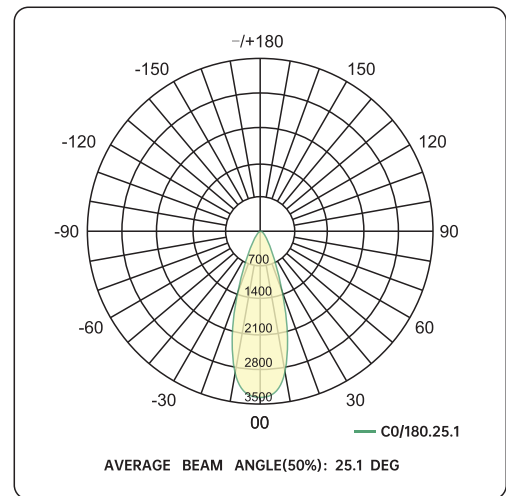

Beam angle: 15°
Delivered Lumens: 464 lumens
CCT: 4000K
CRI: 97
Power: 8W
Efficacy: 58lm/w

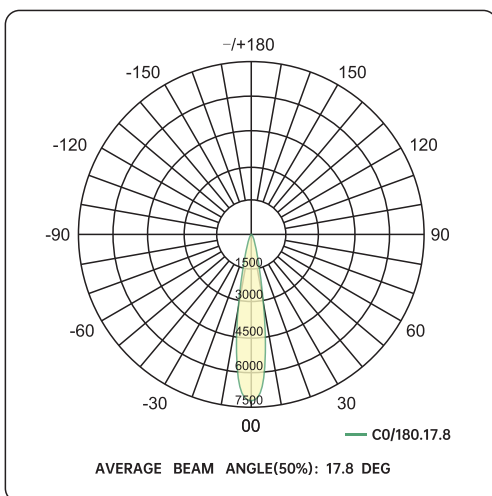


ACCESSORIES

Brackets for New-Construction



BRKT-R25

Cut out:
Round: Ø1" (Ø25mm)

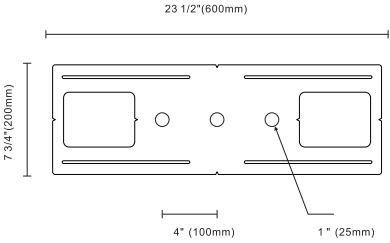


Brackets for New-Construction




BRKT-R29

Cut out:
Round: Ø1 1/4" (Ø29mm)

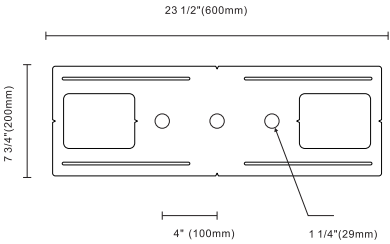

Remark

- Tailored brackets are available with a reasonable surcharge, details as below
- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
 - Hole sizes can be customized within the range of 25-100mm
 - Holes quantity can be indicated, 1-7pcs
 - Holes' positions on the bracket can be done as requests

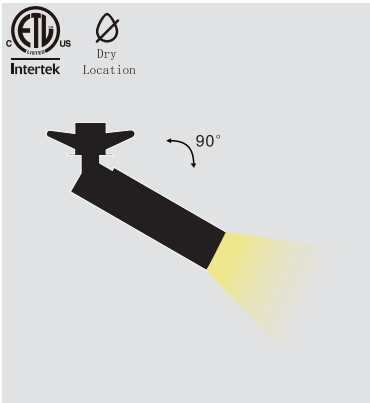


1.18"
30mm




Ø1" (Ø25mm)

1.26"
32mm

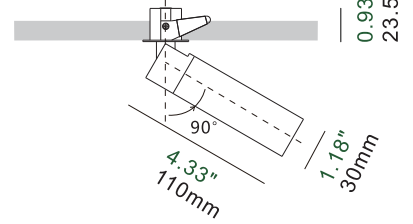


0.93"
23.5mm

1.18"
30mm

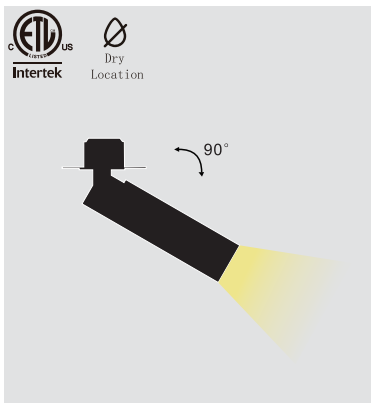


1.18"
30mm



2.36"
60mm

Ø1 1/4" (Ø29mm)




1.14"
29mm

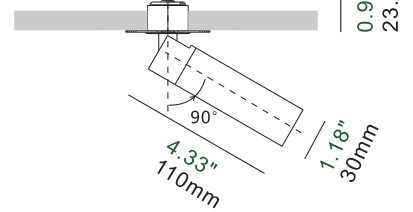

0.93"
23.5mm

1.18"
30mm

Microflange

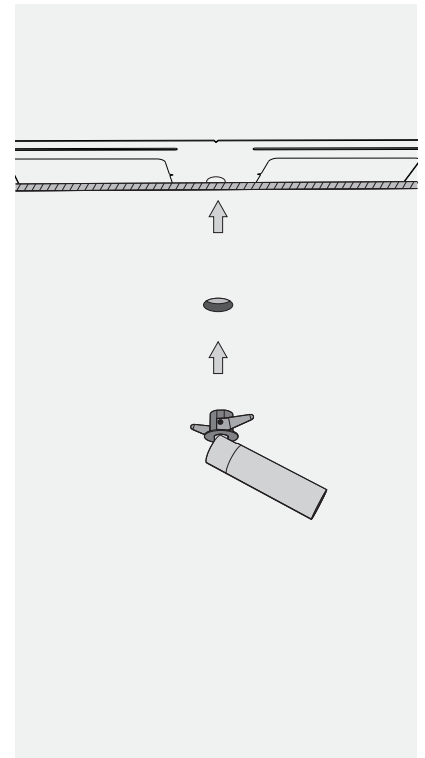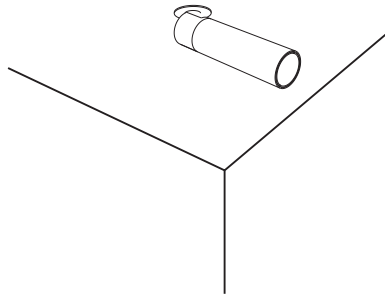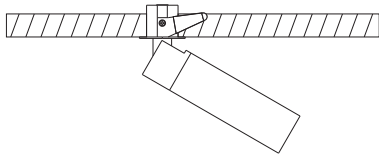

Trimless Drywall

