



PROJECT NAME:

TYPE:



12" - - - - -

	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
12 INCH	S Square	10	QS Microflange	B Black	B Black	B Bridgelux	95 95+ CRI 24 Watts Lumens Divd.-1788	27  2700K 30  3000K 35  3500K 40  4000K	50 50°	KIG On/Off; Triac Phase Dim; 120/277VAC	BRKT-HG10 Non-IC Bracket
			QT Trimless Drywall	W White	W White G Gold		95 95+ CRI 24 Watts Lumens Divd.-1512 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6000K			
					TUNABLE WHITE 95 95+ CRI 24 Watts Lumens Divd.-1512		2760  2700-6000K	*Dali 2ch Driver Remote Placed			
12 Inch Recessed Linear Dot Downlight											

Photometry

Beam angle: 50°


Delivered Lumens: 1788 lumens

CCT: 4000K

CRI: 95

Power: 24W

Efficacy: 74.5lm/w

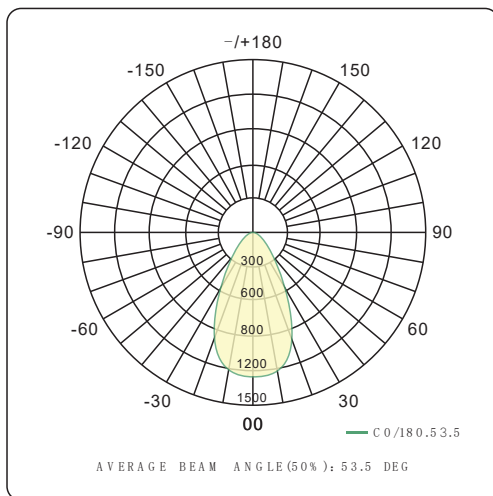


Brackets for New-Construction

**BRKT-HG10**

Cut out:

Square: 12 1/2" x 1 3/4" (319 x 44mm)

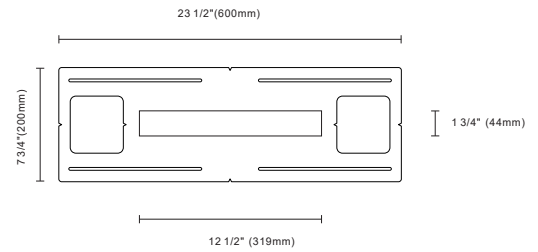
**Remark**

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600x200mm
- Holes' positions on the bracket can be done as requests




1.85"
49mm




12.9"
327.5mm

2.32"
59mm

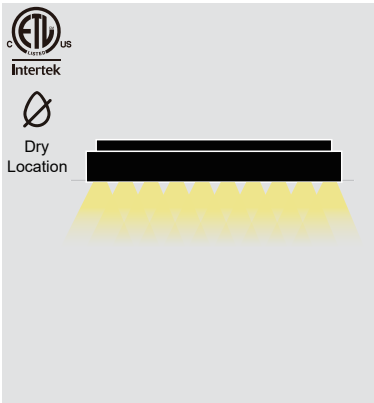




1.57"
40mm



12.5"
317mm

2.32"
59mm

Microflange

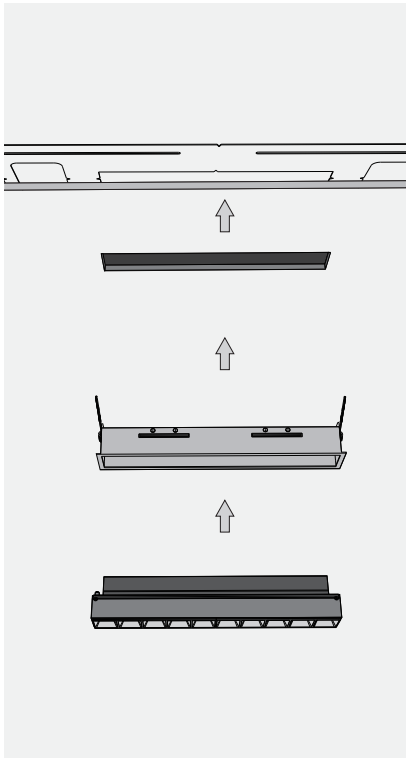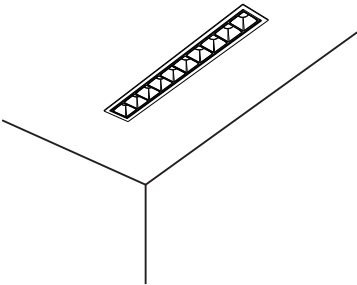

Trimless Drywall

