


2" - - - - -


	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
2 INCH	S	23	QS Microflange QT Trimless Drywall	B Black W White	B Black W White G Gold	B Bridgelux	90 90+ CRI 10 Watts Lumens Dlv.d.-920	27  2700K 30  3000K 35  3500K 40  4000K	35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC <i>*Remote Placed</i>	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights <i>*For more details,pls refer to page 3</i>
							97 97+ CRI 10 Watts Lumens Dlv.d.-630		35 35°		
							Dim To Warm				
							90 90+ CRI 10 Watts Lumens Dlv.d.-650	1830  1800-3000K	35 35°		
							90 90+ CRI 10 Watts Lumens Dlv.d.-767 <i>*External 5CCT Selector</i>	2765A  2700K  3000K  4000K  5000K  6500K	35 35°		
TUNABLE WHITE											
90 90+ CRI 10 Watts Lumens Dlv.d.-767	2765  2700-6500K	25 25°	<i>*Dali 2ch Driver Remote Placed</i>								
2 Inch Recessed Round Adjustable Spotlight											

Photometry

Beam angle: 35°
Delivered Lumens: 890 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 89lm/W

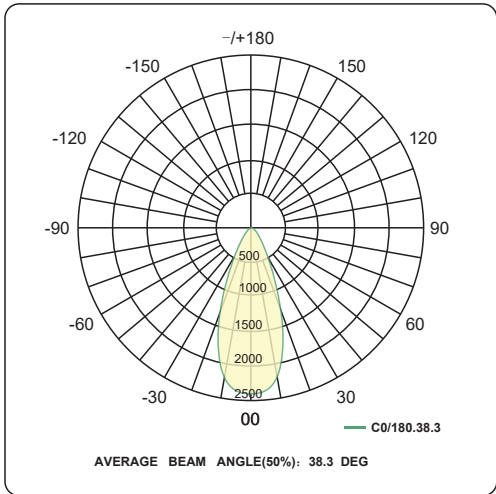


Beam angle: 25°
Delivered Lumens: 630 lumens
CCT: 4000K
CRI: 97
Power: 10W
Efficacy: 63lm/W

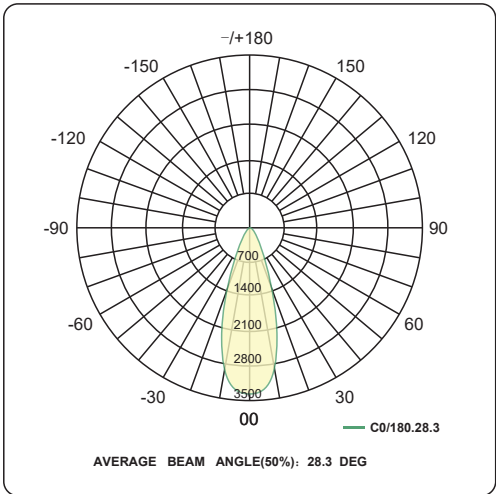

ACCESSORIES

Brackets for New-Construction (4-legs)

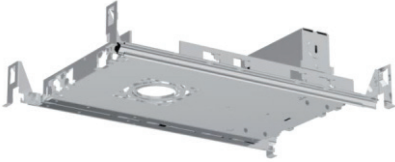


NCP-SR3-R21


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

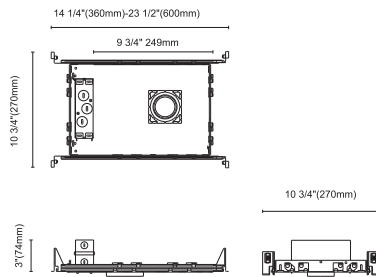

IC-BOX for New-Construction (4-legs)

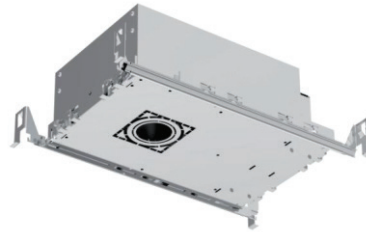


NCBX-SR3-R21





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

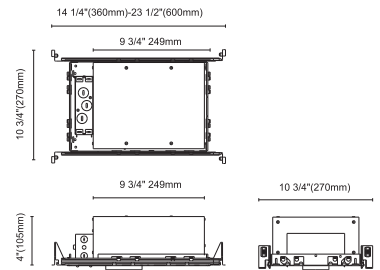

Cut out




Brackets for New-Construction



Cut out:

Round: Ø 2" x 2 (Ø 62mm x 2)

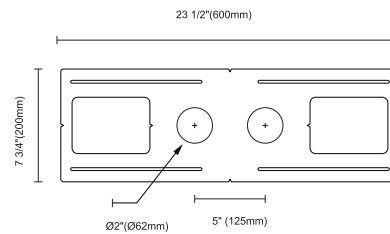

Remark







Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests




NUORDIC LIGHTING COMPANY

Locations: USA: 485 Glenbrook Dr, Lake Worth, FL 33462
Canada: 480 Warren Rd, King City ON L7B 1C4

E: info@nuordic.com
T: +1-561-695-4107

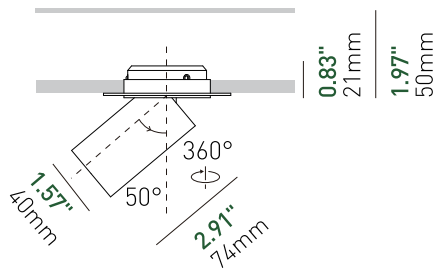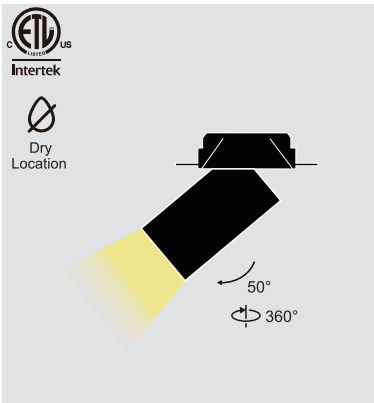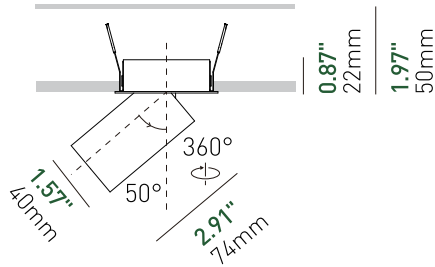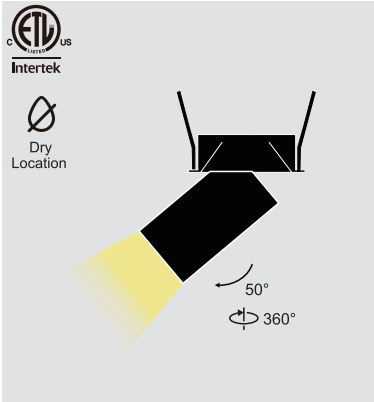

Microflange

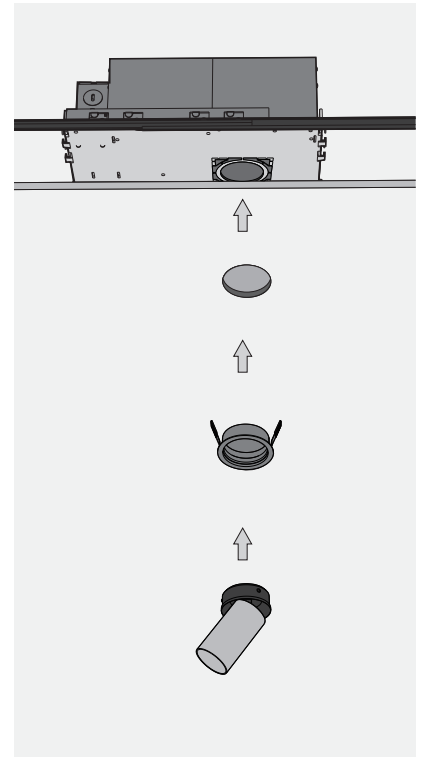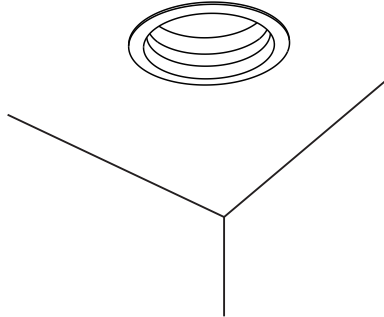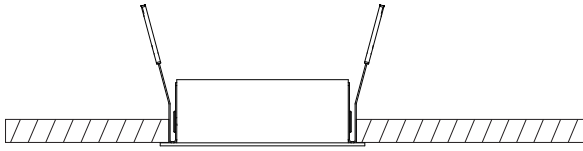

Trimless Drywall

