

PROJECT NAME:

TYPE:




3" - - - - -

	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
3 INCH	R Round	08	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 08 Watts Lumens Divd.-430	27 2700K 30 3000K 35 3500K 40 4000K	25 25°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket
			QT Trimless Drywall	W White	W White G Gold					KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights *For more details,pls refer to page 3
3 Inch Recessed Round Adjustable Twin Mini Spotlight											


Photometry

Beam angle: 25°
Delivered Lumens: 430 lumens
CCT: 4000K
CRI: 90
Power: 08W
Efficacy: 53lm/w

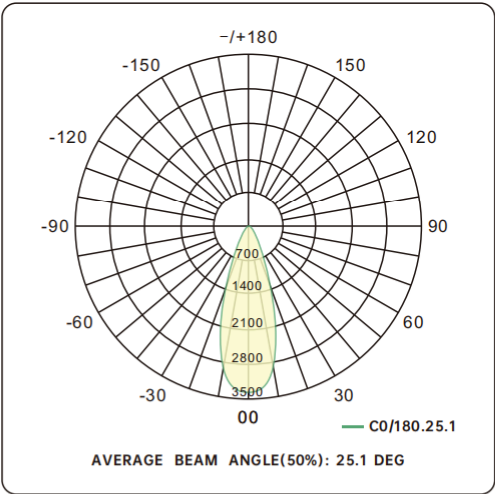

ACCESSORIES


Brackets for New-Construction (4-legs)

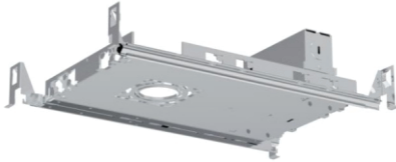


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

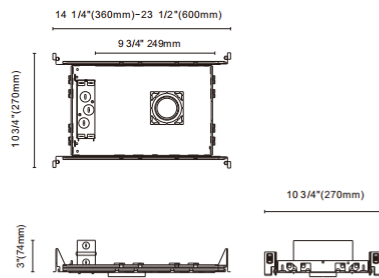


IC-BOX for New-Construction (4-legs)

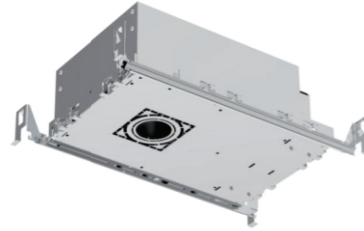





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

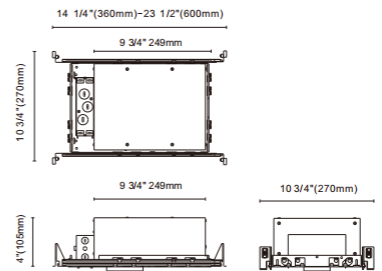

Cut out




Brackets for New-Construction



Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)

Square: □ 77mm*2 (□ 77mm*2)

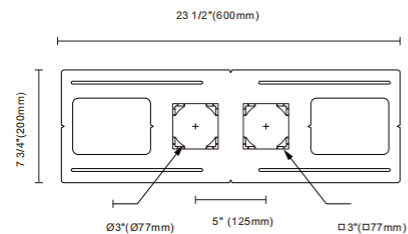

Remark





Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests


NUORDIC LIGHTING COMPANY

Locations: USA: 485 Glenbrook Dr, Lake Worth, FL 33462
Canada: 480 Warren Rd, King City ON L7B 1C4




E: info@nuordic.com
T: +1-561-695-4107

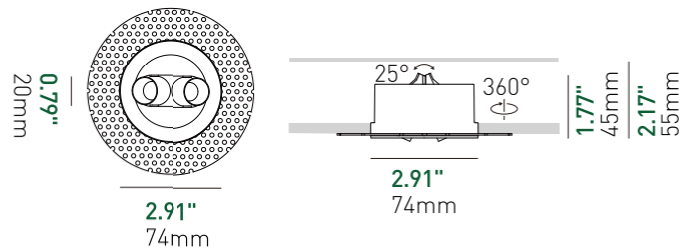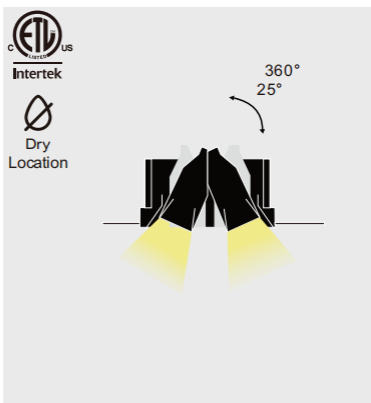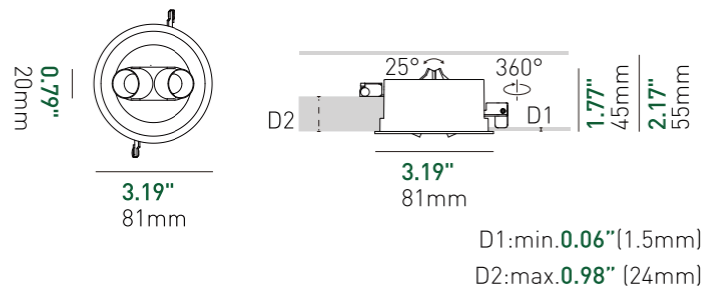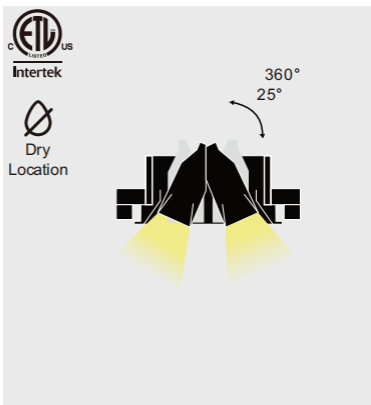

Twins' Four Applications

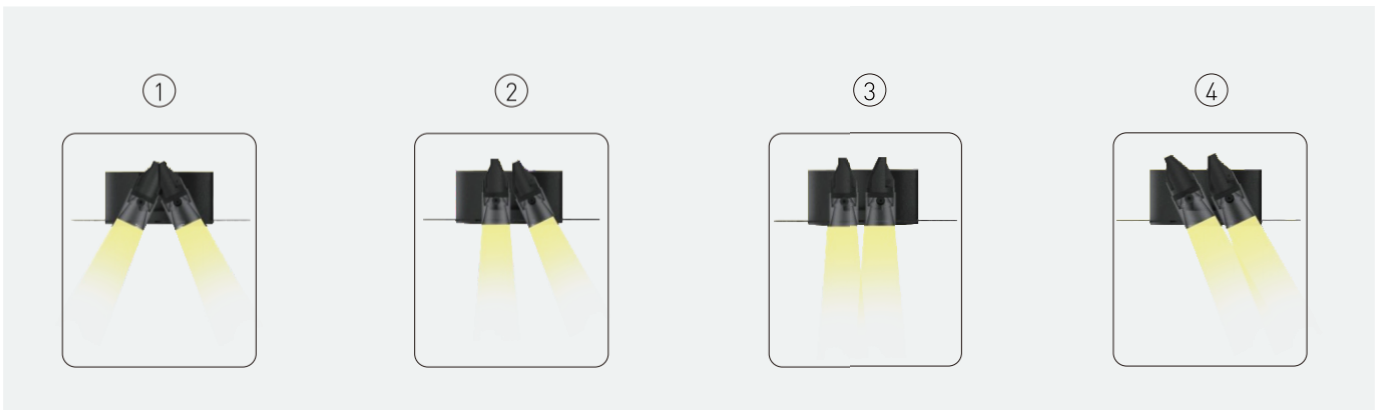

Microflange

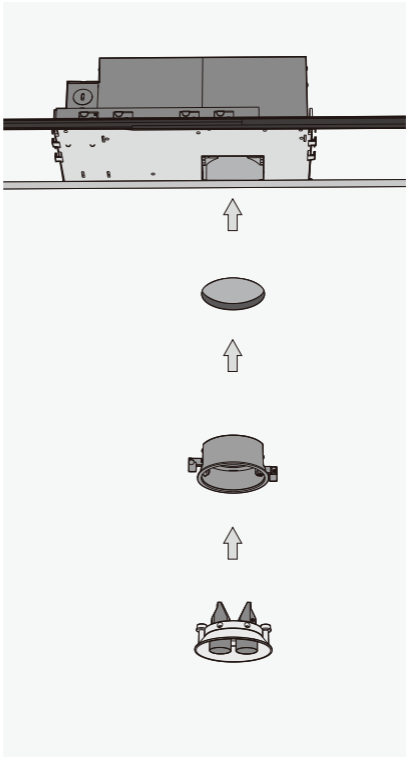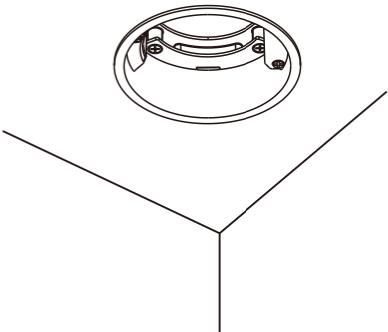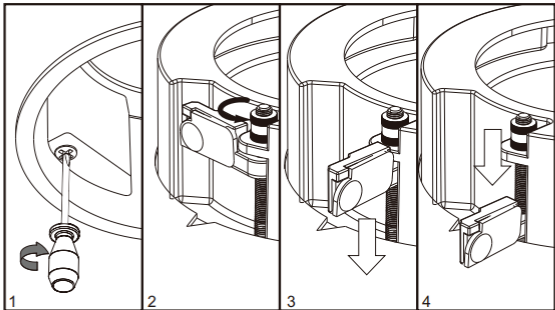

Trimless Drywall

