

PROJECT NAME:

TYPE:

N75-S65




# N75-S65

3" \_\_\_\_\_


|        | SHAPE       | VERSION | TRIM              | FRAME<br>FINISH              | REFLECTOR<br>FINISH                           | LED<br>CHIP    | CRI/LUMENS                                                                               | CCT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | BEAM<br>ANGLE                                            | DIMMING                                                                                                                                           | ACCESSORIES                                                                                                                                                                                      |  |  |  |  |  |  |  |  |  |
|--------|-------------|---------|-------------------|------------------------------|-----------------------------------------------|----------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| 3 INCH | S<br>Square | 65      | QS<br>Microflange | B<br>Black<br><br>W<br>White | B<br>Black<br><br>W<br>White<br><br>G<br>Gold | B<br>Bridgelux | <b>90</b><br>90+ CRI 15 Watts<br>Lumens Divd.-1335                                       | <b>27</b><br> 2700K<br><b>30</b><br> 3000K<br><b>35</b><br> 3500K<br><b>40</b><br> 4000K                                                           | <b>50</b><br>50°<br><b>35</b><br>35°                     | <b>CMEM55</b><br>On/Off;<br>Triac PhaseDim;<br>120VAC<br><br><b>KIG</b><br>On/Off;<br>Triac Phase Dim;<br>120/277VAC<br><br><i>*Remote Placed</i> | <b>NCP-SR3-R21</b><br>Non-IC Bracket<br><br><b>NCBX-SR3-R21</b><br>IC Box<br><br><b>BRKT-2SR75A</b><br>Non-IC Bracket<br>for Dual Lights<br><br><i>*For more details,pls<br/>refer to page 3</i> |  |  |  |  |  |  |  |  |  |
|        |             |         |                   |                              |                                               |                | <b>97</b><br>97+ CRI 15 Watts<br>Lumens Divd.-900                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>50</b><br>50°<br><b>35</b><br>35°<br><b>25</b><br>25° |                                                                                                                                                   |                                                                                                                                                                                                  |  |  |  |  |  |  |  |  |  |
|        |             |         |                   |                              |                                               |                | <b>Dim To Warm</b><br><b>90</b><br>90+ CRI 15 Watts<br>Lumens Divd.-900                  | <b>1830</b><br> 1800-3000K                                                                                                                                                                                                                                                                                                                                                                                     | <b>50</b><br>50°<br><br><b>35</b><br>35°                 |                                                                                                                                                   |                                                                                                                                                                                                  |  |  |  |  |  |  |  |  |  |
|        |             |         |                   |                              |                                               |                | <b>90</b><br>90+ CRI 15 Watts<br>Lumens Divd.-1050<br><br><i>*External 5CCT Selector</i> | <b>2765A</b><br> 2700K<br> 3000K<br> 4000K<br> 5000K<br> 6500K | <b>50</b><br>50°<br><br><b>35</b><br>35°                 |                                                                                                                                                   |                                                                                                                                                                                                  |  |  |  |  |  |  |  |  |  |
|        |             |         |                   |                              |                                               |                | <b>TUNABLE WHITE</b><br><br><b>90</b><br>90+ CRI 15 Watts<br>Lumens Divd.-1050           | <b>2765</b><br> 2700-6500K                                                                                                                                                                                                                                                                                                                                                                                     | <b>25</b><br>25°                                         |                                                                                                                                                   |                                                                                                                                                                                                  |  |  |  |  |  |  |  |  |  |
|        |             |         |                   |                              |                                               |                | 3 INCH RECESSED SQUARE FIXED IP65 OUTDOOR DOWNLIGHT                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                          |                                                                                                                                                   |                                                                                                                                                                                                  |  |  |  |  |  |  |  |  |  |

Photometry


**Beam angle:** 50°  
**Delivered Lumens:** 1335 lumens  
**CCT:** 4000K  
**CRI:** 90  
**Power:** 15W  
**Efficacy:** 89lm/W

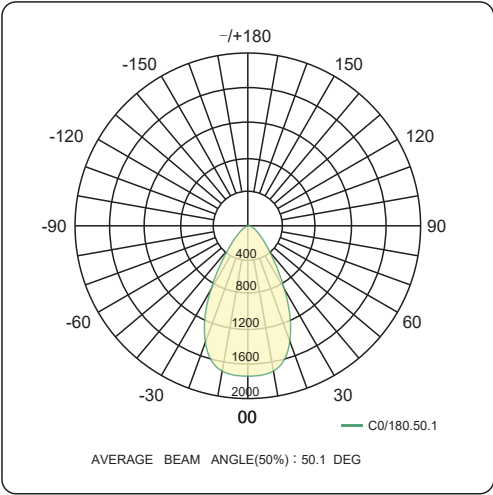

**Beam angle:** 35°  
**Delivered Lumens:** 1230 lumens  
**CCT:** 4000K  
**CRI:** 90  
**Power:** 15W  
**Efficacy:** 82lm/W

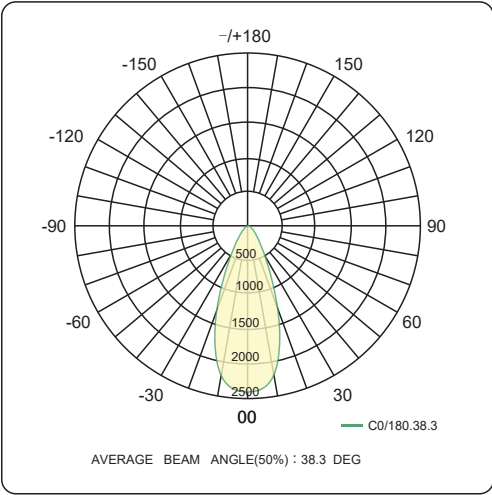


**Beam angle:** 25°  
**Delivered Lumens:** 900 lumens  
**CCT:** 4000K  
**CRI:** 97  
**Power:** 15W  
**Efficacy:** 60lm/W

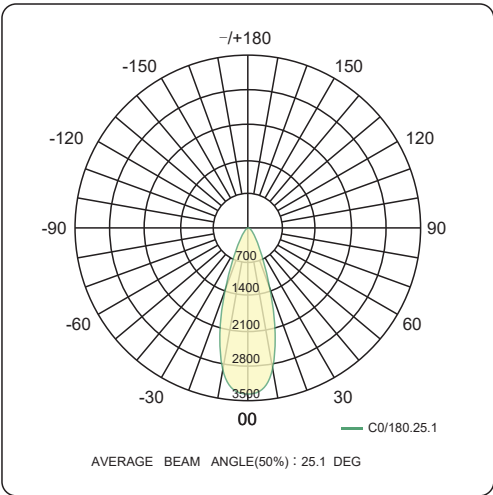

## ACCESSORIES

### Brackets for New-Construction (4-legs)

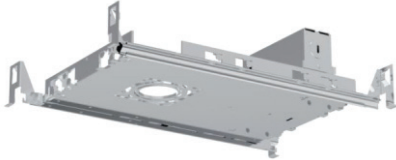


#### NCP-SR3-R21


Cut out:

Round: Ø 3" (Ø 77mm)  
Ø 2" (Ø 62mm)  
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

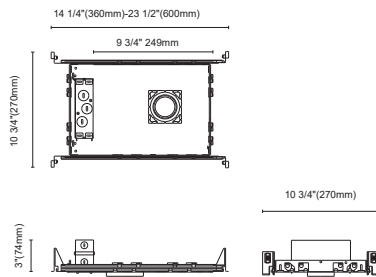

### IC-BOX for New-Construction (4-legs)

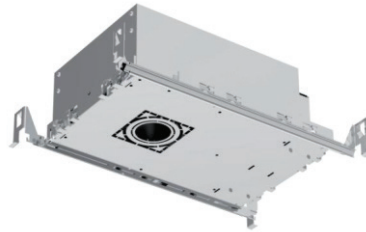


#### NCBX-SR3-R21

Cut out:

Round: Ø 3" (Ø 77mm)  
Ø 2" (Ø 62mm)  
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

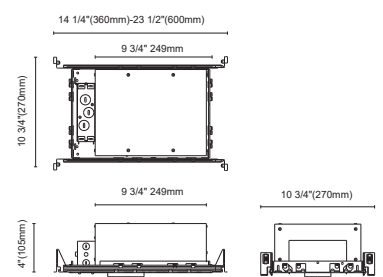

#### Cut out



### Brackets for New-Construction




#### BRKT-2SR75A

Cut out:

Round: Ø 77mm\*2 (Ø 77mm\*2)

Square: □ 77mm\*2 (□ 77mm\*2)

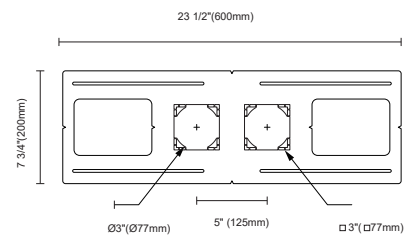

### Remark


Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600\*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

### NUORDIC LIGHTING COMPANY

Locations: USA: 485 Glenbrook Dr, Lake Worth, FL 33462  
Canada: 480 Warren Rd, King City ON L7B 1C4

E: info@nuordic.com  
T: +1-561-695-4107

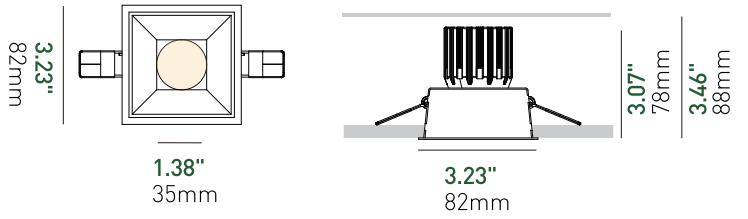

## Microflange

