





3 Inch Semi-Recessed Round Adjustable Downlight Installation




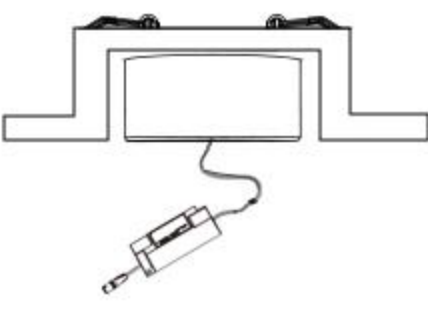
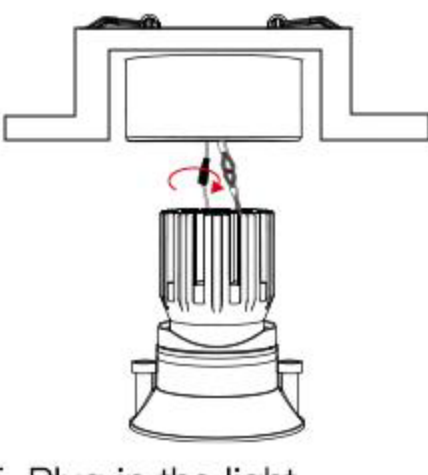
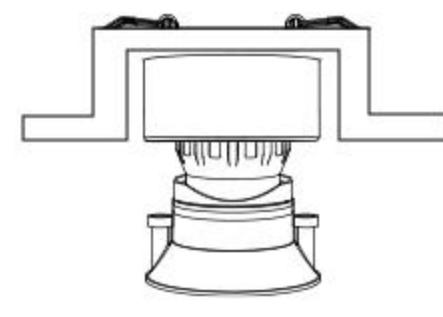
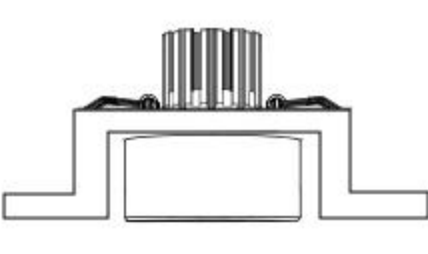
Type 1: Protruded from the ceiling

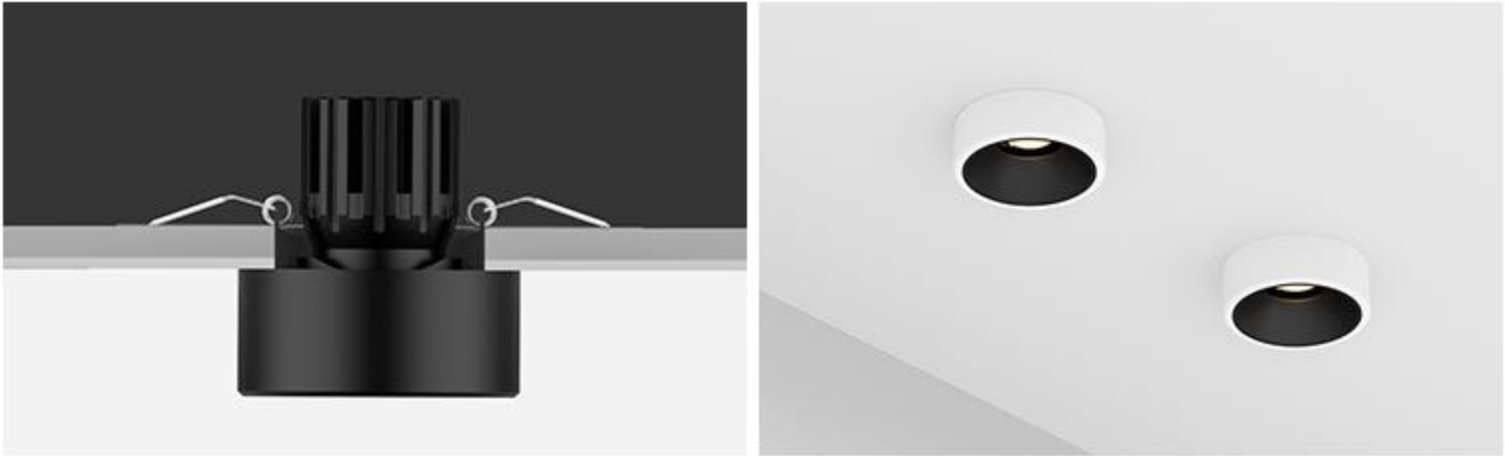

 <p>1. Cutout on the ceiling cutout size: 75mm (2.95")</p>	 <p>2. Plaste-mesh-putty-paint, finish the ceiling</p>	 <p>3. After the paint dry enough, install the frame</p>
 <p>4. Wire the driver</p>	 <p>5. Plug in the light, and buckle the safety rope</p>	 <p>6. Fix the light on by magnet</p>
 <p>7. Done</p>		

Type 2: Flushed with ceiling

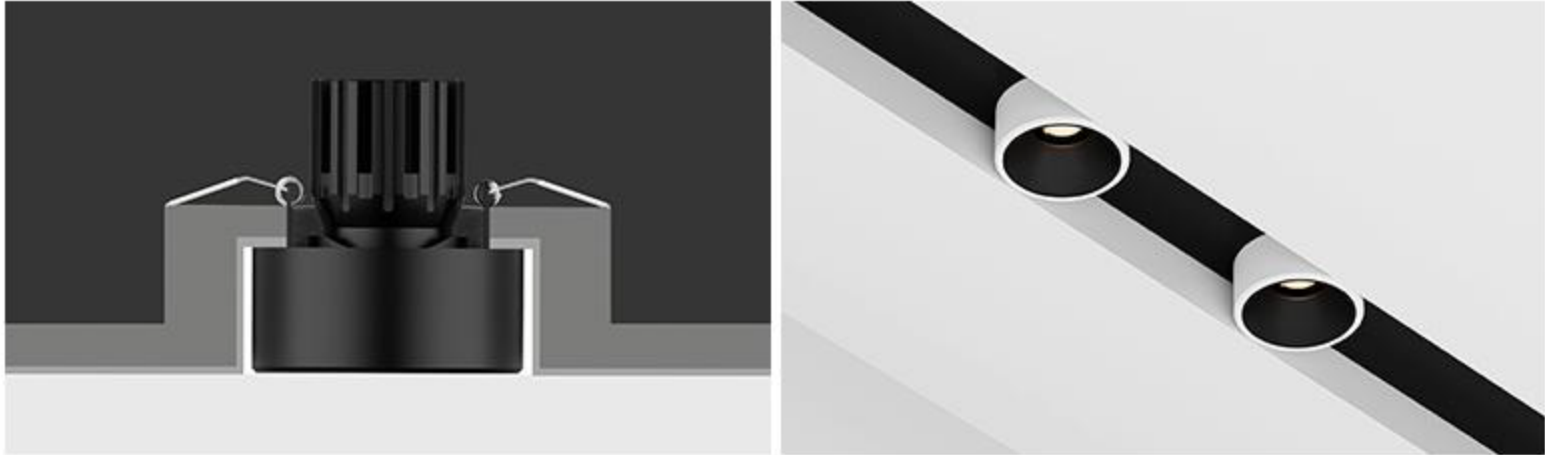

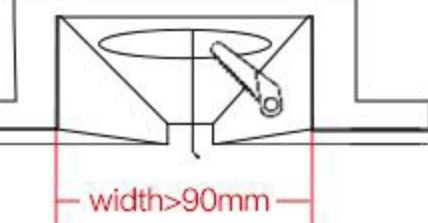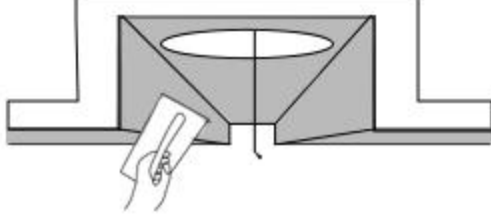 <p>1. Build a channel (width>90mm) on the ceiling, cutout on the ceiling cutout size: 75mm (2.95")</p>	 <p>2. Plaste-mesh-putty-paint, finish the ceiling</p>	 <p>3. After the paint dry enough, install the frame</p>
 <p>4. Wire the driver</p>	 <p>5. Plug in the light, and buckle the safety rope</p>	 <p>6. Fix the light on by magnet</p>
 <p>7. Done</p>		

Note:

1. The embedded part should be placed 1–3mm lower than the gypsum ceiling/drywall.
2. Clean the hole edges while the paint is still wet, for better fitting of the light module.



- To secure safety, a qualified electrician is required to install/remove the luminaire.
- POWER OFF!!! NOT HOT PLUGGING!!!