


PROJECT NAME:	TYPE:

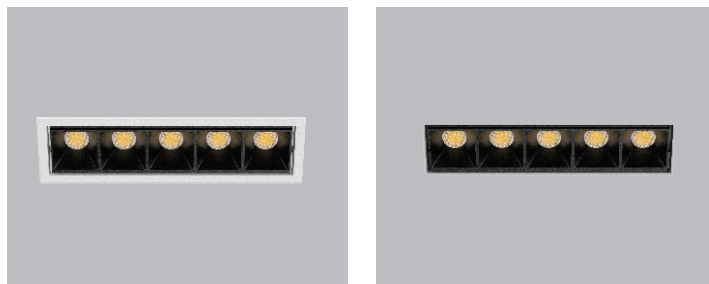


6" - - - - -

	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES	
6 INCH	S Square	05	QS Microflange	B Black	B Black	B Bridgelux	95 95+ CRI 12 Watts Lumens Divd.-894	27  2700K	50 50°	KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCP-HG05 Non-IC Bracket NCBX-HG05 IC Box BRKT-HG05 Non-IC Bracket *For more details,pls refer to page 3	
			QT Trimless Drywall	W White	W White	G Gold		30  3000K				35  3500K
							95 95+ CRI 12 Watts Lumens Divd.-756 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6000K	50 50°			*Dali 2ch Driver Remote Placed
						TUNABLE WHITE 95 95+ CRI 12 Watts Lumens Divd.-756	2760  2700-6000K					
6 Inch Recessed Linear Dot Downlight												


Photometry

Beam angle: 50°
Delivered Lumens: 894 lumens
CCT: 4000K
CRI: 95
Power: 12W
Efficacy: 74.5lm/w

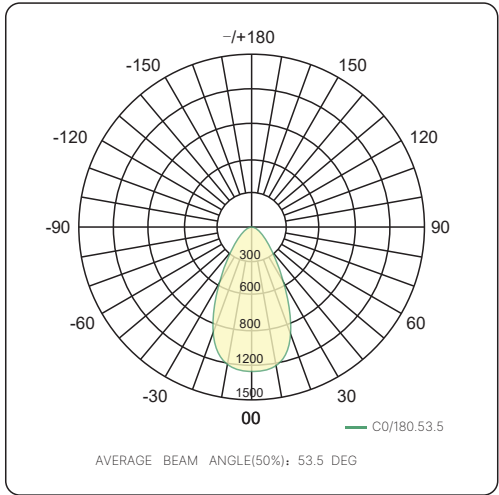

ACCESSORIES


Brackets for New-Construction (4-legs)

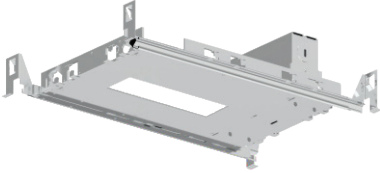


NCP-HG05

Cut out:

Square: 6 1/2" x 1 3/4" (163*44mm)

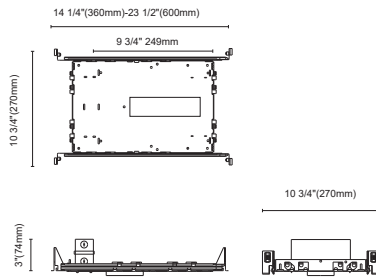


IC-BOX for New-Construction (4-legs)




NCBX-HG05

Cut out:

Square: 6 1/2" x 1 3/4" (163*44mm)

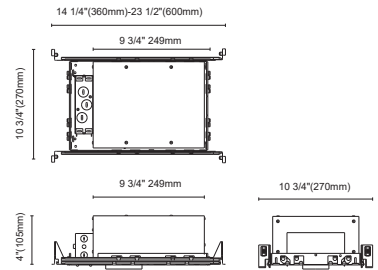

Cut out




Brackets for New-Construction



BRKT-HG05

Cut out:



Square: 6 1/2" x 1 3/4" (163*44mm)

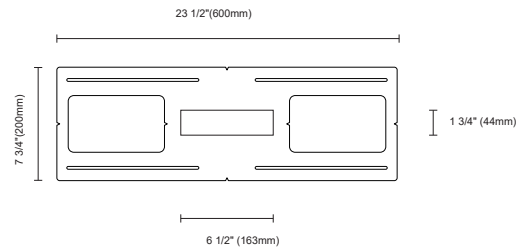




Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Holes' positions on the bracket can be done as requests






2.32"
59mm

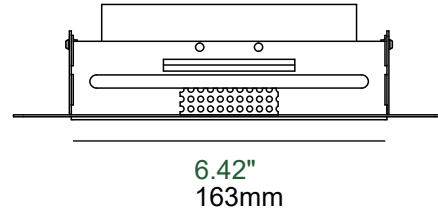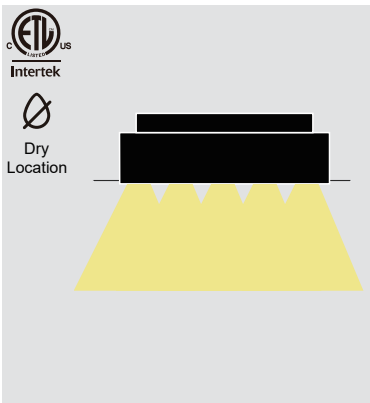

2.32"
59mm

Microflange

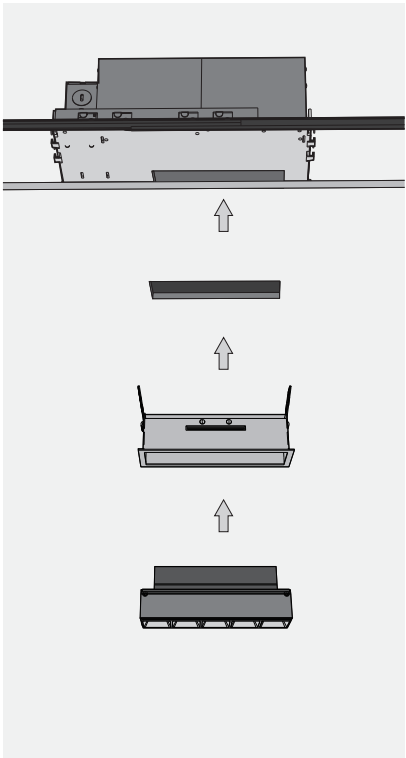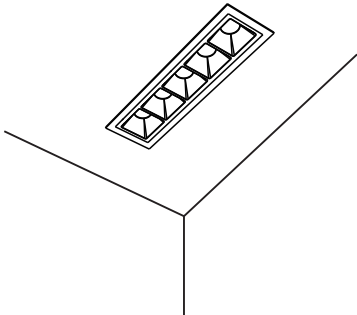

Trimless Drywall

