


PROJECT NAME:

TYPE:

N45-R44



N45-R44




N - - - - -


	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N45	R	44	QS Microflange	B Black	B Black	B Bridgelux	90		50	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket
							90+ CRI 10 Watts Lumens Divd.-990	27  2700K	50°		
								30  3000K	35 35°		
								35  3500K	50 50°		
								40  4000K	35 35°		
									25 25°		
							Dim To Warm		50	*Remote Placed	*For more details,pls refer to page 3
						90		50°			
						90+ CRI 10 Watts Lumens Divd.-650	1830  1800-3000K	35 35°			
						90					
							90+ CRI 10 Watts Lumens Divd.-760	2765A  2700K  3000K  4000K  5000K  6500K	50 50°		
							*External 5CCT Selector		35 35°		
							TUNABLE WHITE				
							90		25	*Dali 2ch Driver Remote Placed	
							90+ CRI 10 Watts Lumens Divd.-760	2765  2700-6500K	25°		
N45-R44QS-W-W-B-90-35-50											

Photometry


Beam angle: 50°
Delivered Lumens: 990 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 99lm/W

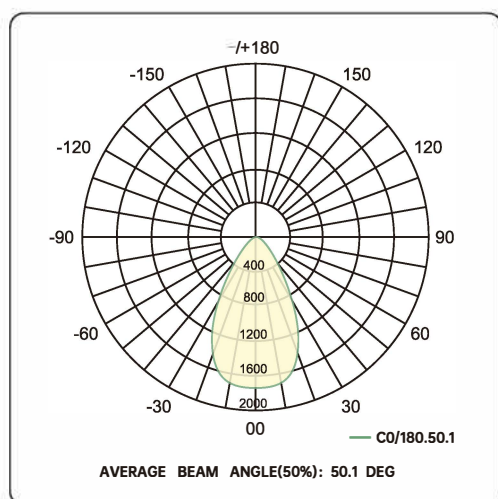

Beam angle: 35°
Delivered Lumens: 920 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 92lm/W

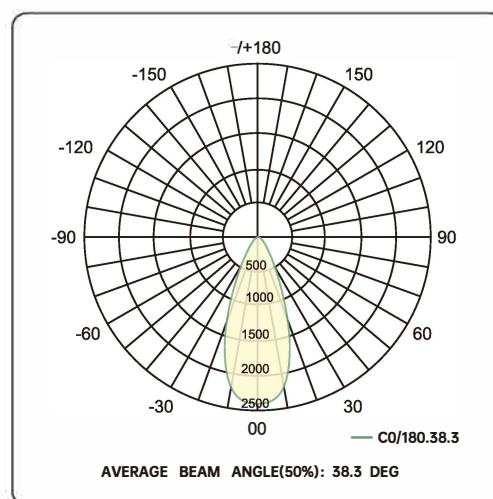

Beam angle: 25°
Delivered Lumens: 630 lumens
CCT: 4000K
CRI: 97
Power: 10W
Efficacy: 63lm/W

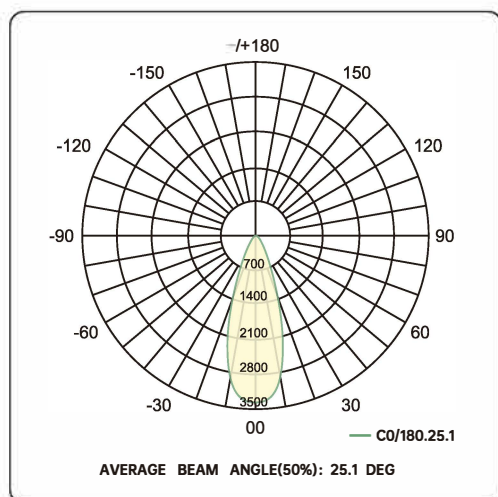

ACCESSORIES

Brackets for New-Construction (4-legs)




NCP-SR3-R21


Cutout:

Round: $\varnothing 3"$ ($\varnothing 77\text{mm}$)
 $\varnothing 2"$ ($\varnothing 62\text{mm}$)
 $\varnothing 1"$ ($\varnothing 50\text{mm}$)

Square: $\square 3"$ ($\square 77\text{mm}$)

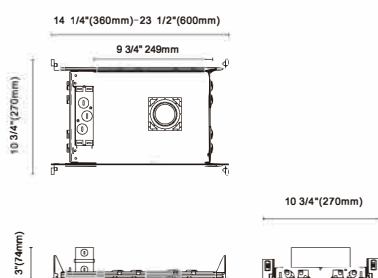

IC-BOX for New-Construction (4-legs)

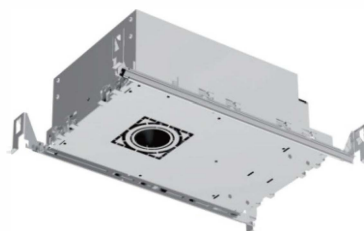


NCBX-SR3-R21


Cutout:

Round: $\varnothing 3"$ ($\varnothing 77\text{mm}$)
 $\varnothing 2"$ ($\varnothing 62\text{mm}$)
 $\varnothing 1"$ ($\varnothing 50\text{mm}$)


Square: $\square 3"$ ($\square 77\text{mm}$)

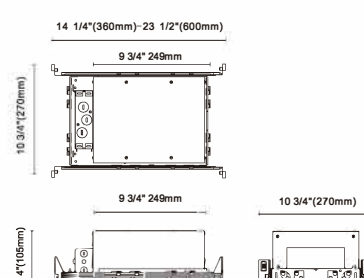


Cut out




$\varnothing 1"$ ($\varnothing 25\text{mm}$)



$\varnothing 2"$ ($\varnothing 51\text{mm}$)



$\varnothing 3"$ ($\varnothing 76\text{mm}$)



$\square 3"$ ($\square 76\text{mm}$)


Brackets for New-Construction



BRKT-2R50A

Cut out:

Round: $\varnothing 1" \times 2$ ($\varnothing 50\text{mm} \times 2$)

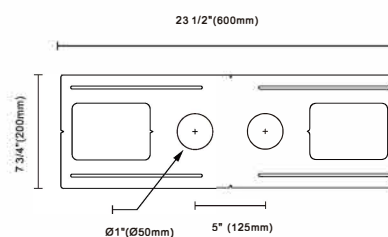



Remark

Tailored brackets are available with a reasonable surcharge, details as below



- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7 pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.




N45-R44QS

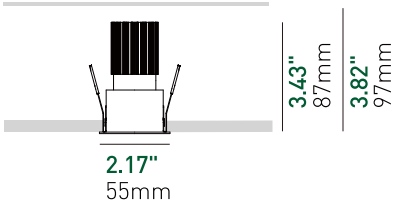

N45-R44QT

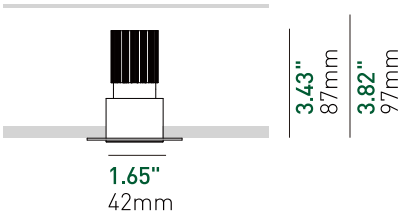

Microflange

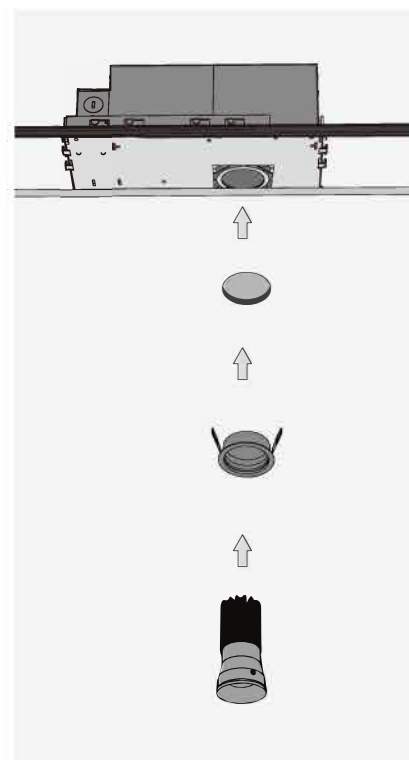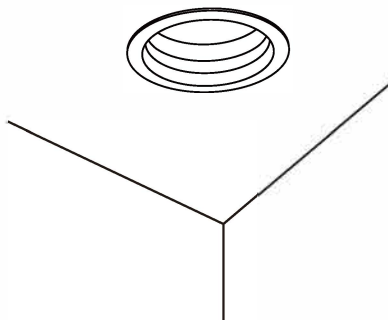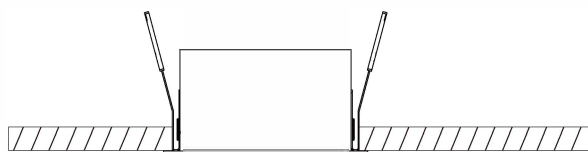

Trimless Drywall

