


**CHIC**

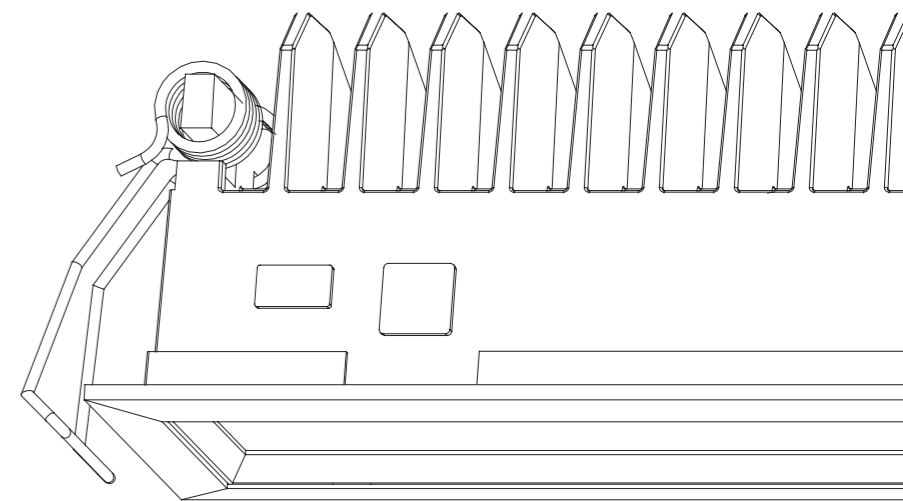

CHIC SERIES

### Product description:

**Material description:** aluminum alloy die-casting processing;

**ProceSSION technology:** aluminum and aluminum surface plus anti-UV sand pattern spraying process, the surface texture strong;


**Cooling technology:** the use of metal conduction cooling;

**Applicable light source:** SMD/ 3W COB / 5-8W

**Optical technology:** high transmittance PMMA material, 3W 10° 15° 24° 30° 50° 10X35° 15X35° Optionalal 5-8W XHP35 with 8° 12° 24° 36° , COB has 18° 24° 36° 60°

**Product features:** Suitable for commercial display, hotel dining, museum, home all kinds of architectural lighting

**MVC0505A-003**

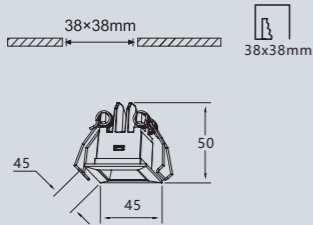

1-10V Step  
Dimmer Control

Triac Dimming

64PCS




DALI Dimmer  
Control




Wireless intel-  
ligent control

Order No  
White(W) Black(D)  
MVC0505A-003L3-W(D)  
L27-2700K  
L3-3000K  
L35-3500K  
L4-4000K


**Simulation effects at different angles**

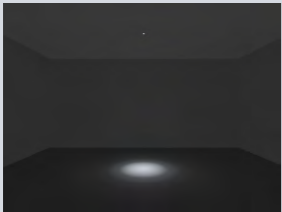


10°

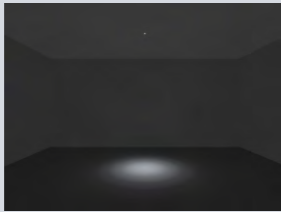


15°

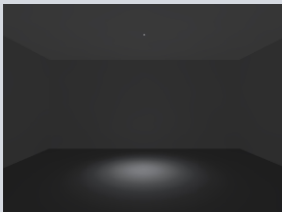


25°

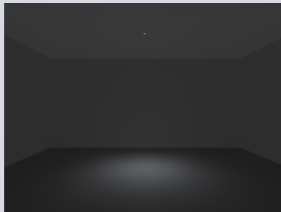

30°

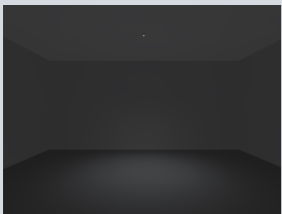


50°

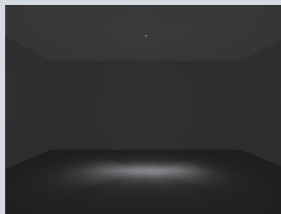

10x35°



3W Ra≥90 10°




H(m)	E(lx)	D(m)
1	2737	0.20
2	684.2	0.40
3	304.1	0.61
4	171.1	0.81
5	109.5	1.02

Beam Angle 10°  
Light Source Luminous Flux 180lm  
Lighting Luminous Flux 158.13lm  
Luminaire Efficiency 87.9%



3W Ra≥90 15°




H(m)	E(lx)	D(m)
1	1690	0.28
2	422.5	0.56
3	187.8	0.85
4	105.6	1.13
5	67.60	1.41

Beam Angle 15°  
Light Source Luminous Flux 180lm  
Lighting Luminous Flux 175.39lm  
Luminaire Efficiency 97.4%



3W Ra≥90 25°




H(m)	E(lx)	D(m)
1	889.9	0.39
2	222.5	0.79
3	98.87	1.18
4	55.62	1.58
5	35.59	1.98

Beam Angle 25°  
Light Source Luminous Flux 180lm  
Lighting Luminous Flux 169.98lm  
Luminaire Efficiency 94.4%



3W Ra≥90 30°




H(m)	E(lx)	D(m)
1	434.1	0.56
2	108.5	1.12
3	48.23	1.68
4	27.13	2.24
5	17.36	2.81

Beam Angle 30°  
Light Source Luminous Flux 180lm  
Lighting Luminous Flux 155.98lm  
Luminaire Efficiency 86.7%



3W Ra≥90 50°




H(m)	E(lx)	D(m)
1	185.7	0.99
2	46.41	1.98
3	20.63	2.97
4	11.60	3.97
5	7.426	4.96

Beam Angle 50°  
Light Source Luminous Flux 180lm  
Lighting Luminous Flux 147.43lm  
Luminaire Efficiency 81.9%




3W Ra≥90 10x35°



H(m)	E(lx)	D(m)
1	1023	0.19
2	255.7	0.38
3	113.6	0.58
4	63.92	0.77
5	40.91	0.97

Beam Angle 10x35°  
Light Source Luminous Flux 180lm  
Lighting Luminous Flux 176.33lm  
Luminaire Efficiency 98%

**MVC0505A-503**

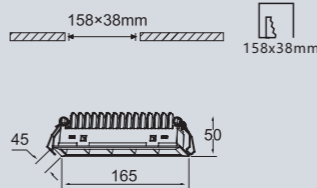

1-10V Step  
Dimmer Control

Triac Dimming

36PCS



DALI Dimmer  
Control




Wireless intel-  
ligent control

Order No  
White(W) Black(D)  
MVC0505A-503-015L3-W(D)  
L27-2700K  
L3-3000K  
L35-3500K  
L4-4000K


**Simulation effects at different angles**




10°

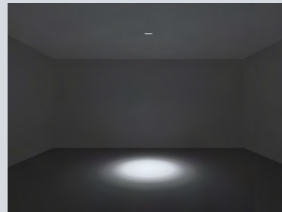


15°

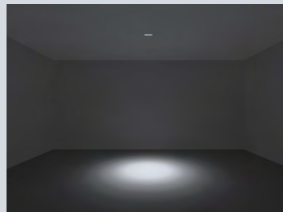


25°

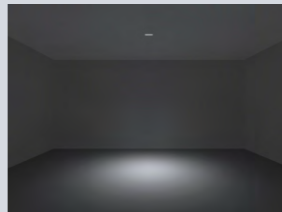

30°

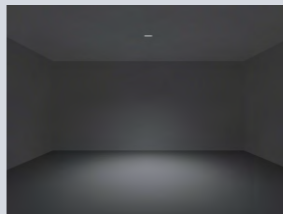


50°

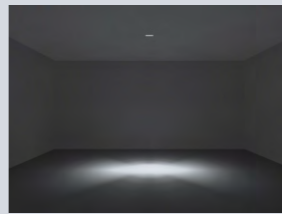

10x35°



5x2.1W Ra≥90 10°




H(m)	E(lx)	D(m)
1	12624	0.19
2	3156	0.39
3	1403	0.59
4	789.0	0.79
5	505.0	0.98

Beam Angle 10°  
Light Source Luminous Flux 996lm  
Lighting Luminous Flux 765.27lm  
Luminaire Efficiency 79.2%



5x2.1W Ra≥90 15°




H(m)	E(lx)	D(m)
1	8840	0.27
2	2210	0.55
3	982.2	0.83
4	552.5	1.11
5	352.5	1.39

Beam Angle 15°  
Light Source Luminous Flux 996lm  
Lighting Luminous Flux 876.16lm  
Luminaire Efficiency 90.7%



5x2.1W Ra≥90 25°




H(m)	E(lx)	D(m)
1	4691	0.39
2	1173	0.78
3	521.2	1.17
4	293.2	1.56
5	187.6	1.95

Beam Angle 25°  
Light Source Luminous Flux 996lm  
Lighting Luminous Flux 860.69lm  
Luminaire Efficiency 89.1%



5x2.1W Ra≥90 30°




H(m)	E(lx)	D(m)
1	2270	0.55
2	567.5	1.11
3	252.2	1.67
4	141.9	2.22
5	90.81	2.78

Beam Angle 30°  
Light Source Luminous Flux 996lm  
Lighting Luminous Flux 805.69lm  
Luminaire Efficiency 83.4%



5x2.1W Ra≥90 50°




H(m)	E(lx)	D(m)
1	986.6	0.96
2	246.6	1.92
3	109.6	2.89
4	61.66	3.85
5	39.46	4.81

Beam Angle 50°  
Light Source Luminous Flux 996lm  
Lighting Luminous Flux 759.05lm  
Luminaire Efficiency 78.6%




5x2.1W Ra≥90 10x35°



H(m)	E(lx)	D(m)
1	5091	0.19
2	1273	0.39
3	565.6	0.58
4	318.2	0.78
5	203.6	0.97

Beam Angle 10x35°  
Light Source Luminous Flux 996lm  
Lighting Luminous Flux 884.16lm  
Luminaire Efficiency 91.5%

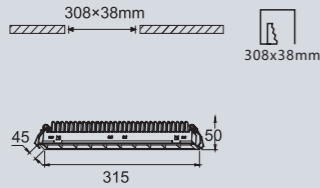

10x2.1W Ra≥90 10°

H(m)	E(lx)	D(m)
1	21501	0.19
2	5375	0.38
3	2389	0.58
4	1344	0.77
5	860.1	0.97

Beam Angle	10°
Light Source Luminous Flux	1911lm
Lighting Luminous Flux	1438.1lm
Luminaire Efficiency	75.3%



10x2.1W Ra≥90 15°

H(m)	E(lx)	D(m)
1	14780	0.27
2	3695	0.54
3	1642	0.82
4	923.8	1.09
5	591.2	1.37

Beam Angle	15°
Light Source Luminous Flux	1911lm
Lighting Luminous Flux	1585.9lm
Luminaire Efficiency	83.0%



10x2.1W Ra≥90 25°

H(m)	E(lx)	D(m)
1	8290	0.40
2	2073	0.80
3	921.1	1.20
4	518.1	1.60
5	331.6	2.00

Beam Angle	25°
Light Source Luminous Flux	1911lm
Lighting Luminous Flux	1608.4lm
Luminaire Efficiency	84.2%



10x2.1W Ra≥90 30°

H(m)	E(lx)	D(m)
1	4341	0.55
2	1085	1.10
3	482.4	1.66
4	271.3	2.21
5	173.6	2.77

Beam Angle	30°
Light Source Luminous Flux	1911lm
Lighting Luminous Flux	1530.8lm
Luminaire Efficiency	80.1%



10x2.1W Ra≥90 50°

H(m)	E(lx)	D(m)
1	2333	0.75
2	583.2	1.50
3	259.2	2.25
4	145.8	3.01
5	93.31	3.76

Beam Angle	50°
Light Source Luminous Flux	1911lm
Lighting Luminous Flux	1406.7lm
Luminaire Efficiency	73.6%



10x2.1W Ra≥90 10x35°

H(m)	E(lx)	D(m)
1	9746	0.19
2	2436	0.38
3	1083	0.57
4	609.1	0.77
5	389.8	0.96

Beam Angle	10x35°
Light Source Luminous Flux	1911lm
Lighting Luminous Flux	1732lm
Luminaire Efficiency	90.6%



1-10V Step  
Dimmer Control



Triac Dimming



24PCS




DALI Dimmer  
Control




Wireless intel-  
ligent control

Order No  
White(W)    Black(D)  
MVC0505A-1003-030L3-W(D)  
L27-2700K  
L3-3000K  
L35-3500K  
L4-4000K


#### Simulation effects at different angles

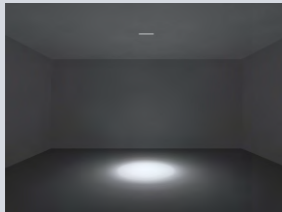


10°

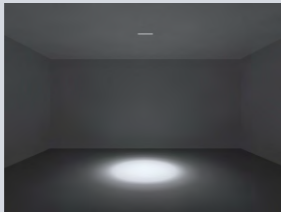


15°

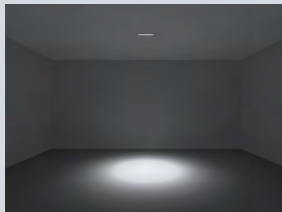


25°

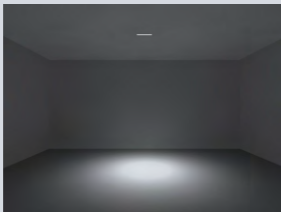

30°

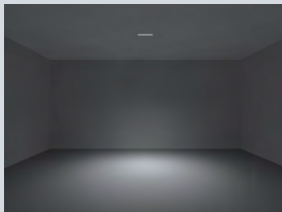

50°

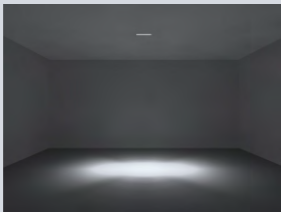



10x35°







The future of the store business, the importance of color value is self-evident, color, visual, experience into the operation, which will be building space can be value-added and sustainable development of the most important element;  
Ling-induced series of RGBW bright lights as a scene within the atmosphere of rendering is an extremely important part; specifically for the need to express the atmosphere through the dyeing space, need  
Color appeal to improve the attention of the window atmosphere, the need to change the mood of color changes in the entertainment space, and moderate light rendering, the same will bring functional space  
More possibilities and endless fun.

## MVC0505B-503

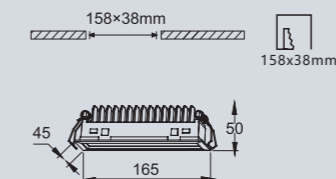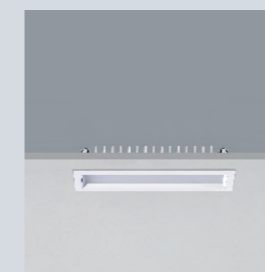


Order No  
White(W) Black(D)  
MVC0505B-503-015L3-W(D)  
L27-2700K  
L3-3000K  
L35-3500K  
L4-4000K

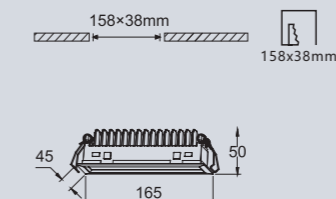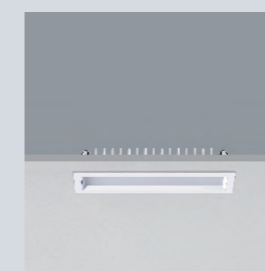

号 Order No  
White(W) Black(D)  
MVC0505C-503-015RGBW-W(D)  
L27-2700K  
L3-3000K  
L35-3500K  
L4-4000K




5x2.1W Ra≥90 120°

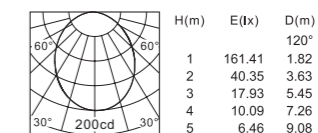

Beam Angle 120°  
Light Source Luminous Flux 1000lm  
Lighting Luminous Flux 350.7lm  
Luminaire Efficiency 35.07%



120°  
5x2.1W Ra≥90 120°

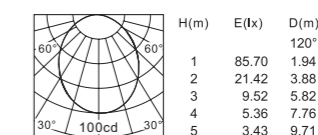

Beam Angle 120°  
Light Source Luminous Flux 475.0lm  
Lighting Luminous Flux 193.5lm  
Luminaire Efficiency 40.74%