


PROJECT NAME:	TYPE:

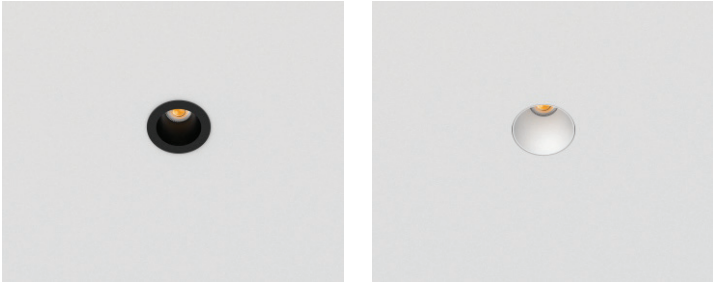


0.5" - - - - -


	SHAPE	VERSION	TRIM	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
0.5 INCH	R	25	QS Microflange QT Trimless Drywall	B Black W White	H HONOURTEK	90 90+ CRI 6 Watts Lumens Divd.-270	27 2700K 30 3000K 35 3500K 40 4000K	25 25° 15 15°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	BRKT-R25 Non-IC Bracket for Three Lights *For LN75-R25QS BRKT-R29 Non-IC Bracket for Three Lights *For LN75-R25QT *For more details,pls refer to page 3
0.5 Inch Recessed Round Fixed Downlight										

Photometry

Beam angle: 25°
Delivered Lumens: 270 lumens
CCT: 4000K
CRI: 90
Power: 6W
Efficacy: 45lm/w

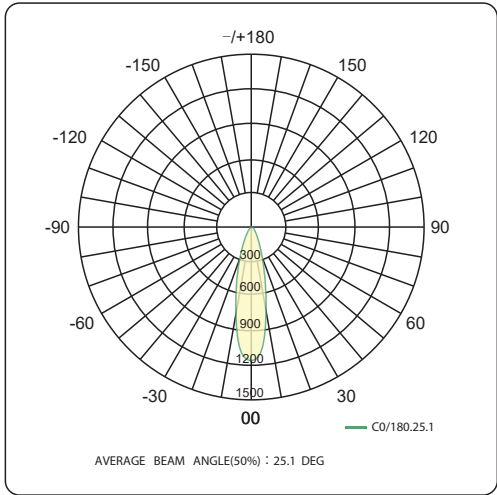

Beam angle: 15°
Delivered Lumens: 240 lumens
CCT: 4000K
CRI: 90
Power: 6W
Efficacy: 40lm/w

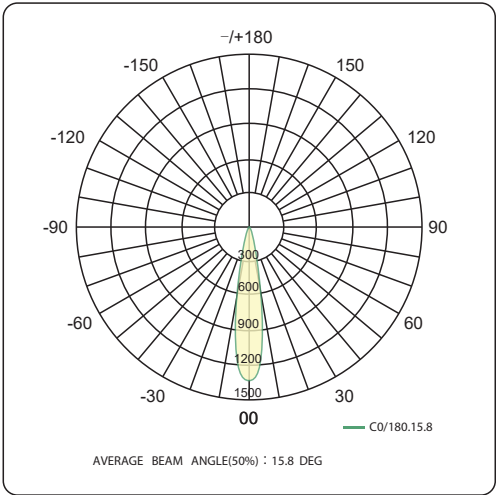


ACCESSORIES

Brackets for New-Construction



BRKT-R25

Cut out:
Round: Ø1" (Ø25mm)

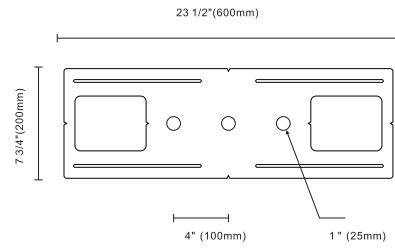


Brackets for New-Construction



BRKT-R29






Cut out:
Round: Ø1 1/4" (Ø29mm)

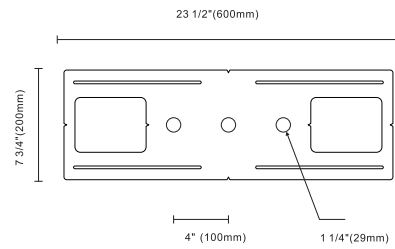




Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

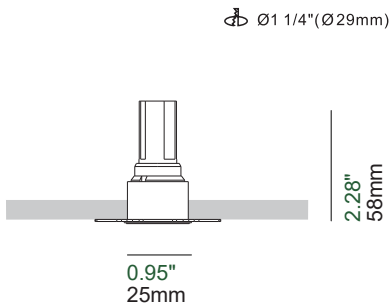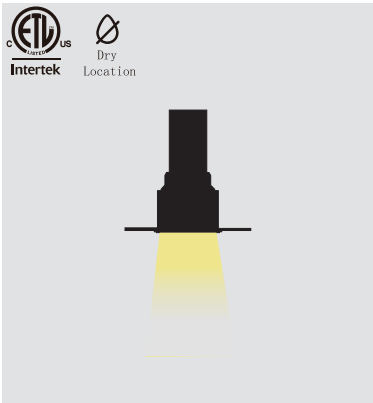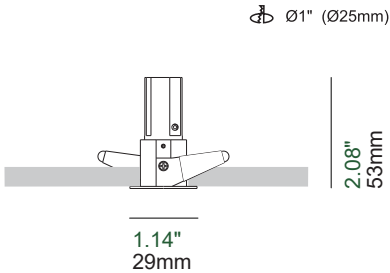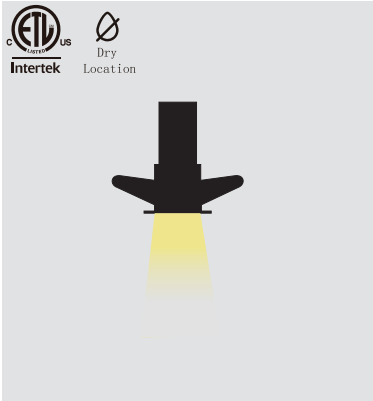

Microflange

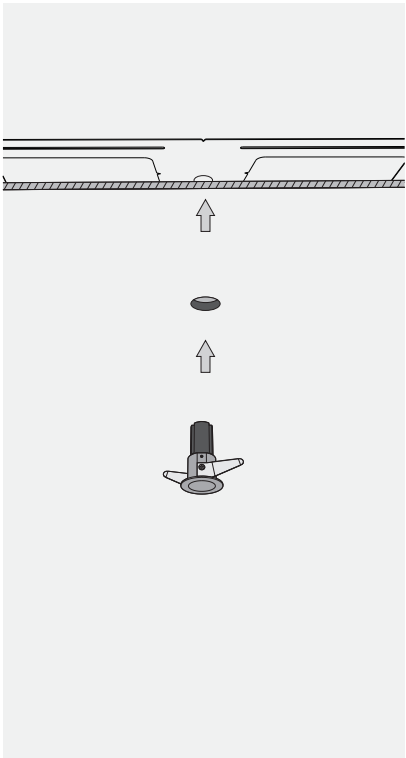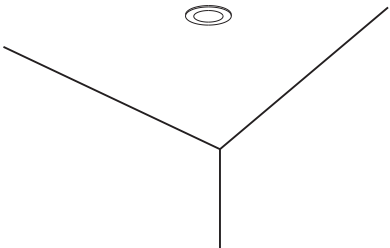

Trimless Drywall

