




3" - - - - - - - - - -


	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
3 INCH	R Round	44	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1335	27  2700K 30  3000K 35  3500K 40  4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights *For more details,pls refer to page 3
	S Square		QT Trimless Drywall	W White	W White	G Gold	97 97+ CRI 15 Watts Lumens Divd.-900	1830  1800-3000K	50 50° 35 35°		
							90 90+ CRI 15 Watts Lumens Divd.-1050 *External 5CCT Selector	2765A  2700K 3000K 4000K 5000K 6500K	50 50° 35 35°		
							TUNABLE WHITE 90 90+ CRI 15 Watts Lumens Divd.-1050	2765  2700-6500K	25 25°		
3 Inch Recessed Square Fixed IP44 Downlight											

Photometry


Beam angle: 50°
Delivered Lumens: 1335 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 89lm/W

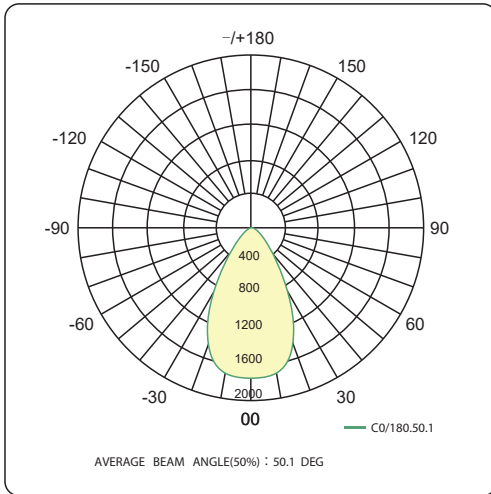

Beam angle: 35°
Delivered Lumens: 1230 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 82lm/W

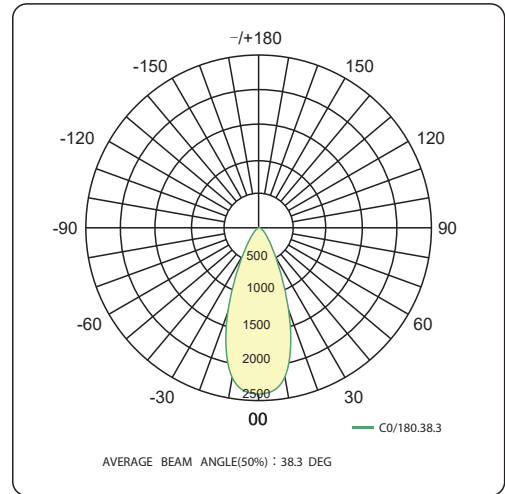


Beam angle: 25°
Delivered Lumens: 900 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 60lm/W

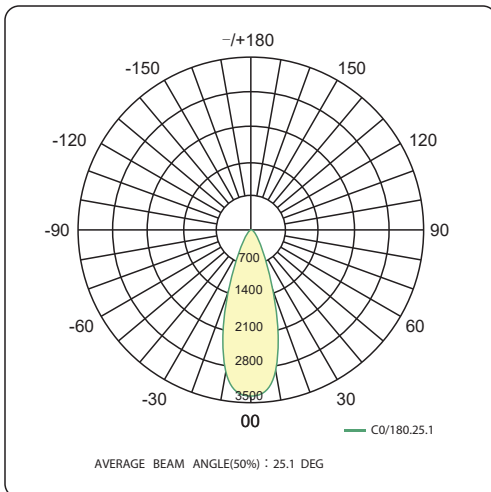

ACCESSORIES

Brackets for New-Construction (4-legs)

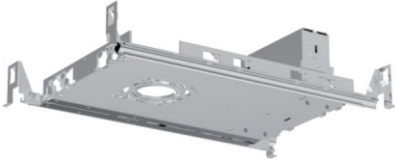


NCP-SR3-R21


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

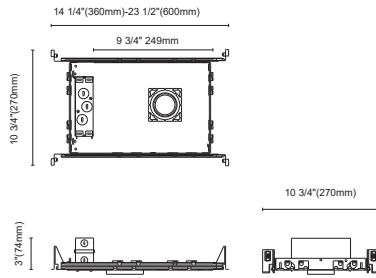

IC-BOX for New-Construction (4-legs)

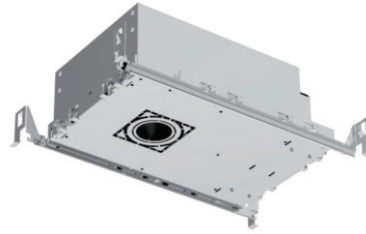


NCBX-SR3-R21





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)


Square: □ 3" (□ 77mm)

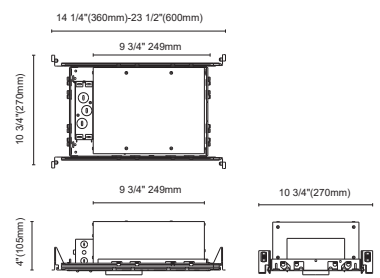

Cut out




Brackets for New-Construction

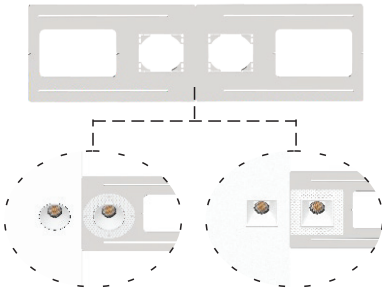

BRKT-2SR75A

Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)
Square: □ 77mm*2 (□ 77mm*2)

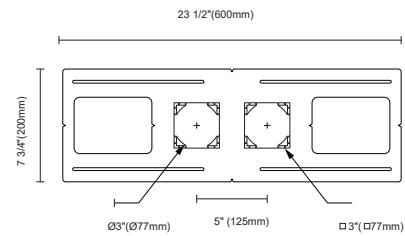

Remark









Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests




NUORDIC LIGHTING COMPANY

Locations: USA: 485 Glenbrook Dr, Lake Worth, FL 33462
Canada: 480 Warren Rd, King City ON L7B 1C4

E: info@nuordic.com
T: +1-561-695-4107

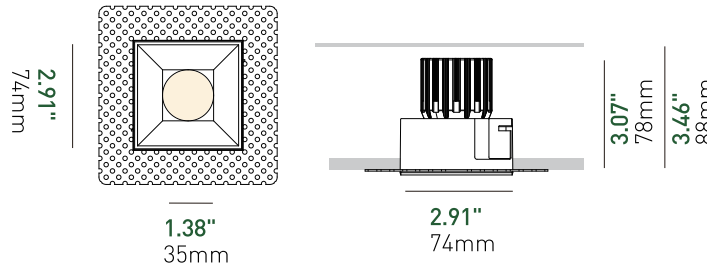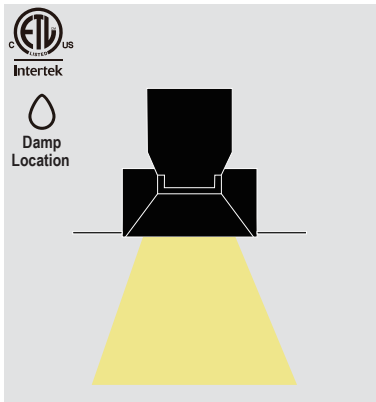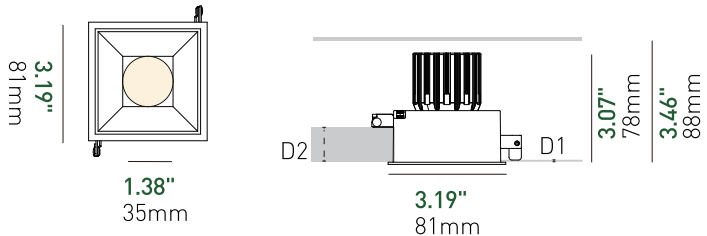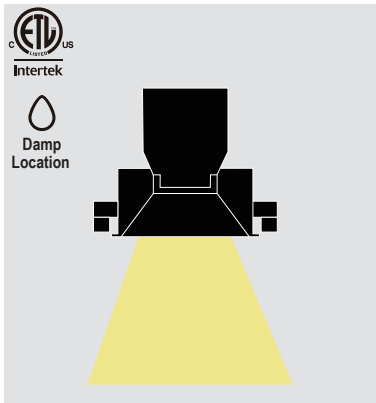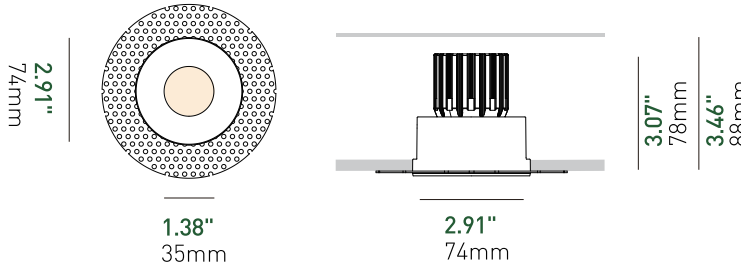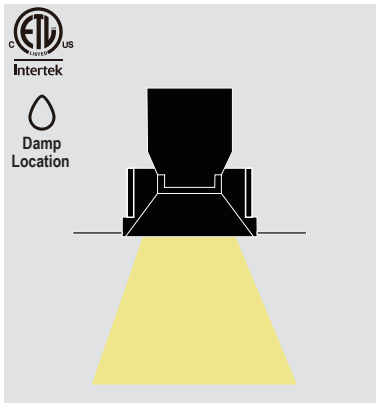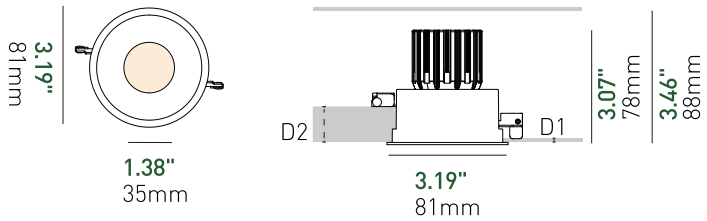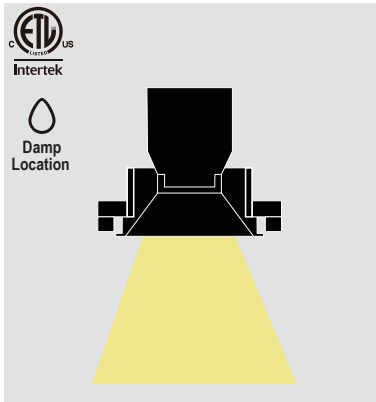

Microflange

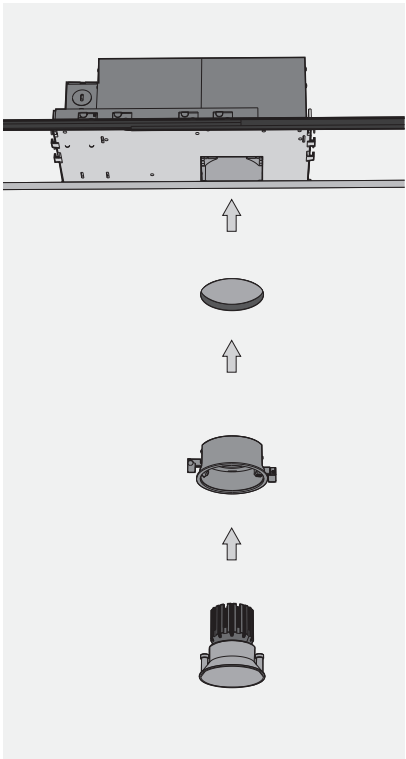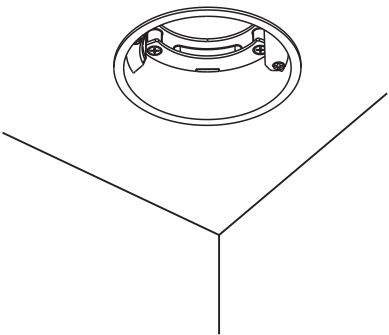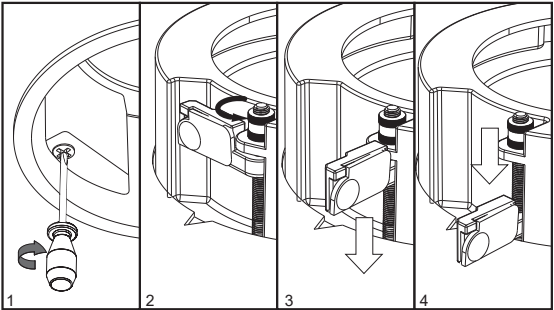

Trimless Drywall

